


COAXIAL MINI/U-6 Cu/Cu



KULLANIM ALANLARI

-Bina içi CATV, CCTV sistemlerinde dağıtım kablosu ve düşük zayıflama istenen uydu sistemlerinde bağlantı kablosu olarak kullanılır.

APPLICATION

-It is used as a distribution cable for indoor CATV, CCTV systems and as a connection cable for satellite systems where lower attenuation is required.

KABLO YAPISI

1-İletken	0,65mm Ø Elektrolitik Bakır
2-Yalıtkan	2,90mm Ø Fiziksel Köpük PE
3-1.Ekran	Cu-Pes Bant (100% Kapama)
4-2.Ekran	Elektrolitik Bakır Örgü
5-Kılıf	4,40mm Ø PVC Kompaund, Yeşil
6-Toplam Ağırlık	PVC 30kg/km
7-Standart Uzunluk	100/500/1000/2000m


CONSTRUCTION

1-Conductor	0,65mm Ø Electrolytic Copper
2-Insulation	2,90mm Ø Physical Foam PE
3-1.Screen	Cu-Pes Tape (100% Coverage)
4-2.Screen	Electrolytic Copper Braid
5-Sheath	4,40mm Ø PVC Compound, Green
6-Total Weight	PVC 30kg/km
7-Standard Length	100/500/1000/2000m

TEKNİK ÖZELLİKLER

TECHNICAL CHARACTERISTICS

YALITIM DİRENCİ INSULATION RESISTANCE	EFEKTİF KAPASİTE MUTUAL CAPACITANCE	YAYILMA HIZI VELOCITY OF PROPAGATION	ÇALIŞMA VOLTAJİ OPERATING VOLTAGE	TEST VOLTAJİ TEST VOLTAGE	BÜKÜLME YARIÇAPI BENDING RADIUS	ÇALIŞMA SICAKLIĞI TEMPERATURE RANGE	EMPEDANS IMPEDANCE	ALEV GECİKTİRİCİLİK TESTİ FLAME RETARDANT TEST
>2000MΩxkm	53±2pF/m	82%	1kV	2500 V	20xCableØ	-40°C - +70°C	75±3Ω	IEC 60332-1-2 DIN EN 60332-1-2 EN 60332-1-2

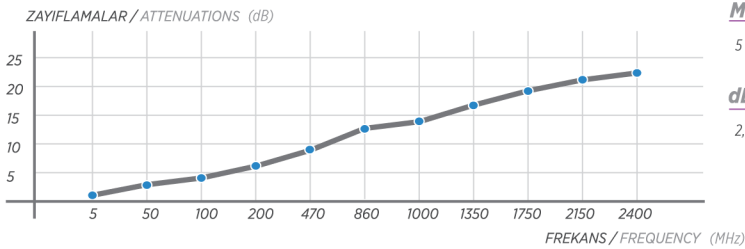ELEKTRİKSEL ÖZELLİKLER
ELECTRICAL CHARACTERISTICSZAYIFLAMALAR (20°C)
ATTENUATIONS (20°C)

MHz

5 200 400 800 1000 2150 2400 3000

dB/100m

2,88 14 19,3 29 31,46 48,1 52 57,65